

Portable pipe bevelling machine

Range: 28 - 76 mm ID
(Optional from 20 mm ID).

Functions: Bevelling, facing & weld removal.

Materials: Any kind of steel.

Power: Pneumatic / Electric.


Note: Popular machine in boiler repair & Erection Work.



TBM 3000 - P




TBM 3000 - ER
(INDIAN ELECTRIC DRIVE)

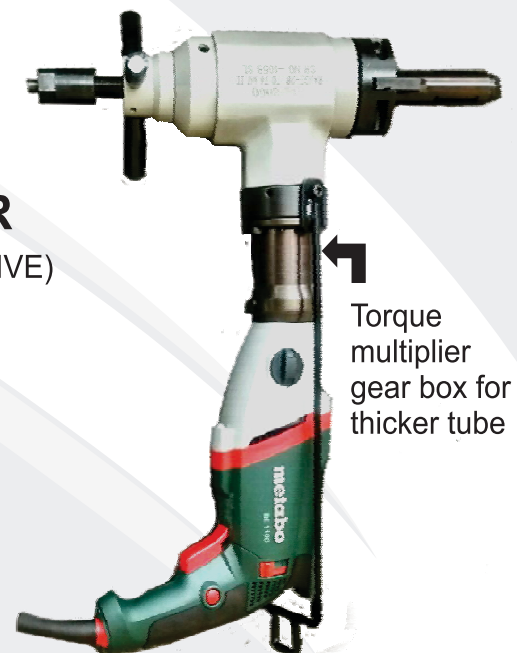

Torque multiplier gear box for thicker tube

TBM 3000 - EG
(GERMAN ELECTRIC DRIVE)

PARAMETER	UNIT	TBM3000		
		ER	EG	P
Free Cutter	Rpm	140	Variable Speed 5-90	110
Type	-	Electric	Electric	Pneumatic
Power	WATT	596	1100	619
Air Consumption	CFM	-	-	42
Air Pressure	PSI	-	-	90
Voltage	V	230	230	-
Min Inside Dia	MM	28	28	28
Max Outside Dia	MM	80	80	80
Clamping Range (inside diameter)	MM	28-76	28-76	28-76
Optional Clamping Range	MM	20-30	20-30	20-30
Feed Stroke	MM	40	40	40
Material	-	CS &	CS & SS	CS &
Standard Weight	KG	15	11.5	9

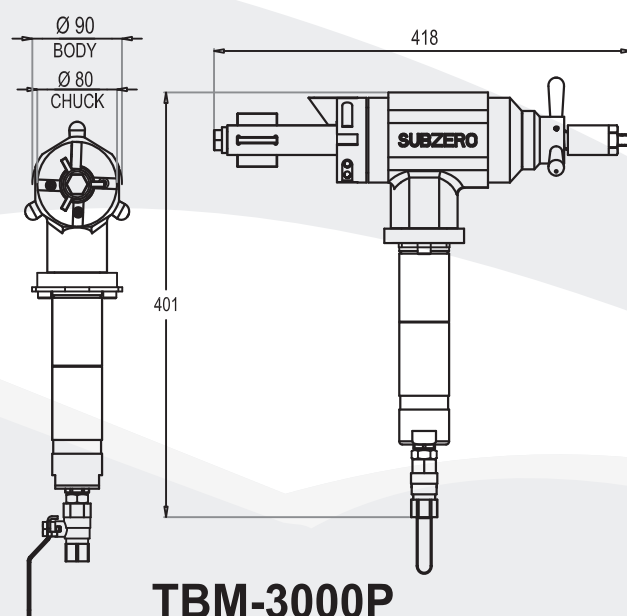

TBM-3000P

Shaft



Standard


RANGE : 28 - 76 mm




Optional

RANGE : 20 - 30 mm

Holder



Standard



Optional

